

Steel ball valves, reduced bore


copper / copper, DN 15-50, reduced bore

Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+C
Solder connection	DN 15-50 Copper, EN 1057: 2006
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 FPM
Operation	DN 15-50 With zinc-plated steel handle




Operation conditions

-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

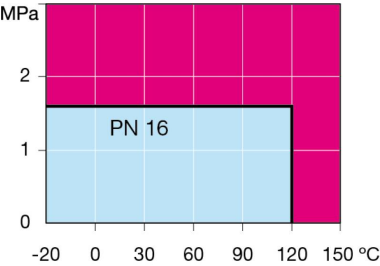


Not for steam

DN 15-50

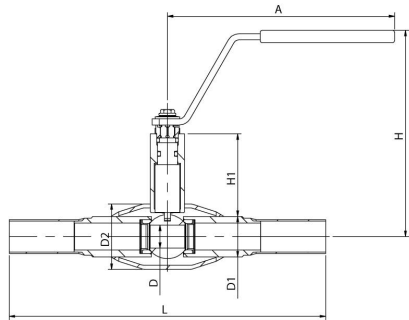

DN 15-50



DN	PN	Product no.	A	D	D1	D2	D4	D5	H	H1	L	kg
15	16	282454	147	10	21.3	33.7	15.0		128	52	195	0.5
20	16	28245670	145	15	26.9	42.4		22.0	133	53	204	0.7
20	16	28245638	145	15	26.9	42.4	22.0		133	53	204	0.7
20	16	282455	147	15	26.9	42.4	18.0		133	53	204	0.7
25	16	28245720	145	20	33.7	48.3	28.0		139	55	230	1.0
32	16	28246740	144	25	42.4	60.3		35.0	120	43	294	1.4
40	16	28246840	188	32	48.3	70.0		42.0	120	43	325	1.8
50	16	28246920	188	40	60.3	88.9		54.0	127	44	350	2.6