

Steel ball valves, reduced bore


303 series, copper / copper, DN 15-50, reduced bore

Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+C
Solder connection	DN 15-50 Copper, EN 1057: 2006
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 FPM
Operation	DN 15-50 With zinc-plated steel handle




Operation conditions

-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

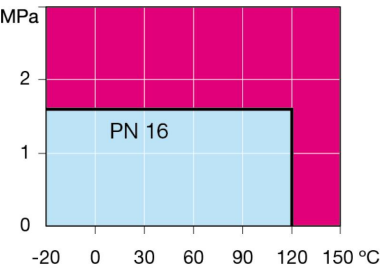


Not for steam

DN 15-50

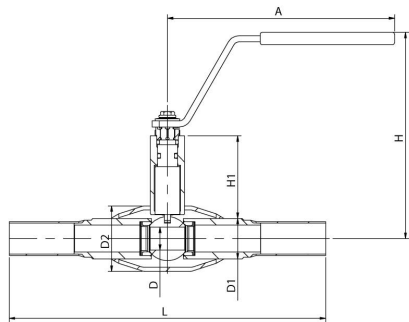

DN 15-50



DN	PN	Product no.	A	D	D1	D2	D4	D5	H	H1	L	kg
15	16	303015/H	147	10	21.3	33.7	15.0		128	52	195	0.5
20	16	303020/H22	145	15	26.9	42.4		22.0	133	53	204	0.7
20	16	303020/H	145	15	26.9	42.4	22.0		133	53	204	0.7
20	16	303015/H18	147	15	26.9	42.4	18.0		133	53	204	0.7
25	16	303025/H	145	20	33.7	48.3	28.0		139	55	230	1.0
32	16	303032	144	25	42.4	60.3		35.0	120	43	294	1.4
40	16	303040	188	32	48.3	70.0		42.0	120	43	325	1.8
50	16	303050	188	40	60.3	88.9		54.0	127	44	350	2.6