


Steel ball valves, reduced bore

301 series, welding, EN (DIN) / copper, DN 15-50, reduced bore

Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+C
Solder connection	DN 15-50 Copper, EN 1057: 2006
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 FPM
Operation	DN 15-50 With zinc-plated steel handle




Operation conditions
-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

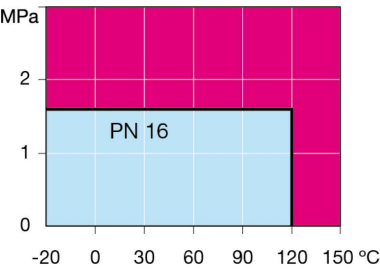


Not for steam

DN 15-50

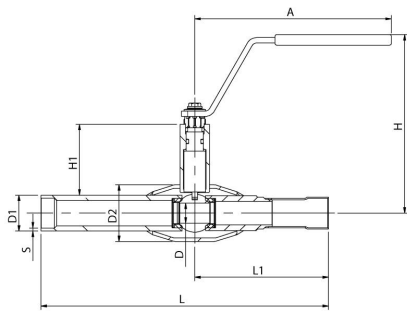

DN 15-50

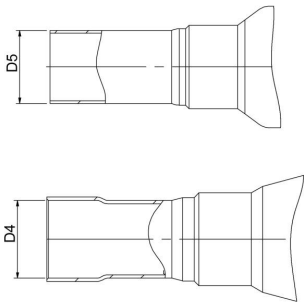

DN	PN	Product no.	A	D	D1	D2	D4	D5	H	H1	L	L1	S	kg
15	16	301015/H	147	10	21.3	33.7	17.0		129	52	215	100	2	0.5
20	16	301020/H	147	15	26.9	42.4	22.0		133	53	215	100	2,3	0.7
25	16	301025/H	145	20	33.7	48.3	28.0		118	34	230	115	2,6	1.0
25	16	301025/H22	145	20	33.7	48.3	22.0		139	55	230	115	2,6	1.0
32	16	301032	145	25	42.4	60.3		35.0	121	33	279	149	2,6	1.4
40	16	301040	188	32	48.3	70.0		42.0	121	44	292	162	2,6	1.8
50	16	301050	188	40	60.3	88.9		54.0	127	44	323	173	2,9	2.6