

Underground ball valves, full bore

welding / welding, EN (DIN), DN 150-400, full bore

Body	DN 150-350 Steel, P235GH (1.0345) DN 400 Steel, P355 NL1 (1.0566)/ GP240GH (1.0619)
Ball	DN 150-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 150-400 PTFE+C
Stem	DN 150-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 150-400 FPM
Operation	DN 150-400 Valves are available with angle gear, standard hexagon adapter 27 or 32 mm
Top of stem	DN 150-400 Stainless steel, X5CrNi18-10 (1.4301)




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)



Not for steam

DN 150-400

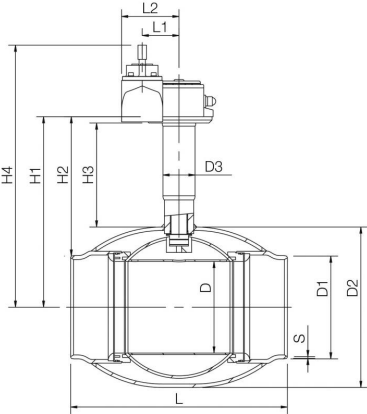

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	L	L1	L2	S	W1	W2	kg
150	25	234694	150	168.3	273.0	76.1	490	406	334	713	400	84	149	4,5	81	198	90.0
200	25	234695	200	219.1	355.6	76.1	525	415	327	765	530	97	162	5	90	208	140.0
250	25	234696	250	273.0	457.0	88.9	580	443	331	809	550	138	222	5	141	235	190.0
300	25	234697	290	323.9	508.0	114.3	603	440	329	832	686	138	222	5,6	141	235	210.0
350	25	234698	340	355.6	610.0	168.3	680	502	350	909	762	138	222	6,3	150	235	370.0
400	25	234699	390	406.0	660.0	178.0	720	516	350	946	1100	182	267	7,1	188	236	670.0