

Control and shut-off butterfly valves, reduced bore

BRC W2/GS series, Δp = 25 bar, welding / welding, GOST, DN 900-1200, reduced bore


Body	DN 900-1200 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408) DN 1200 Stainless steel, GX2CrNiMoN22-5-3 (1.4470)
Seat	DN 900-1200 1.4542 + HCr plating
Stem	DN 900-1200 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1200 Graphite
Bearing	DN 900-1200 PTFE + AISI 316 net
Operation	DN 900-1200 Valve is equipped with manual gear




Operation conditions

Body:	PN 25
Trim:	Δp = 25 bar
Temperature:	-40 °C – +250 °C
DN1200:	-20 °C – +200 °C Below 0 °C contact manufacturer
Leakage rate:	A or B (EN 12266-1) Depending on requirement

DN 900-1200

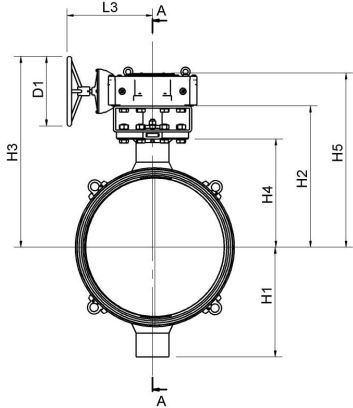

DN 900-1200

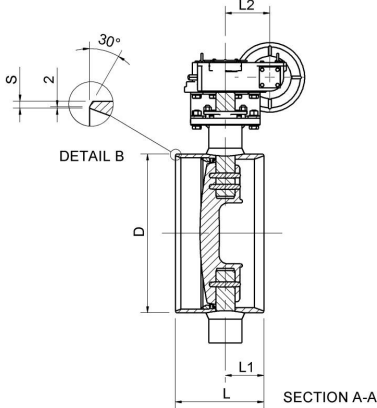

DN	PN	Product no.	D	D1	H1	H2	H3	H4	H5	L	L1	L2	L3	S	kg
900	25	BRC900W2/GS	920	400.0	631	813	1098	623	1003	510	221	256	505	14	1170.0
1000	25	BRC1000W2/GS	1020	400.0	678	879	1164	689	1069	550	224	256	506	15	1509.0
1200	25	BRC1200W2/GS	1220	500.0	730	1043	1423	856	1304	580	285	250	632	15	2344.0