


Branching valves, full bore


Hot tapping valve, welding / welding, EN (DIN), DN 20-150, full bore

Body	DN 20-150 Steel, P235GH (1.0345)
Ball	DN 20-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 20-150 PTFE+C
Stem	DN 20-150 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 20-150 FPM
Operation	DN 20-150 with socket wrench

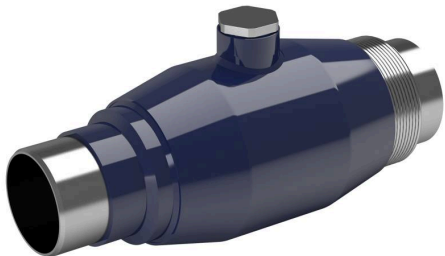


Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

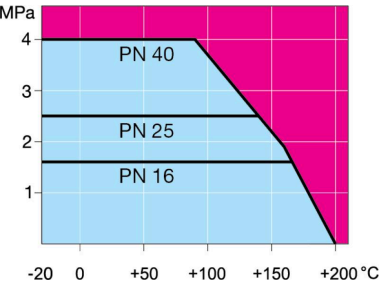


Not for steam

DN 20-125

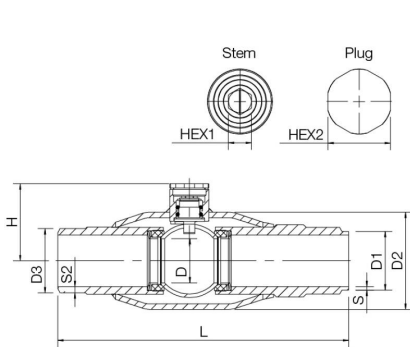

DN 150

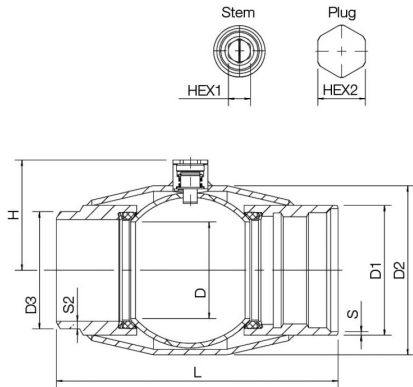

DN	PN	Product no.	D	D1	D2	D3	H	HEX1	HEX2	L	S	S2	kg
20	40	281485	20	26.9	48.3	33.7	40	9	22	170	2.3	5.9	1.0
25	40	281486	25	33.7	60.3	36.5	45	9	22	209	2.6	4.3	1.5
32	40	281487	32	42.2	70.0	46.2	50	9	22	209	2.5	4.5	1.7
40	40	281488	40	48.3	76.1	52.1	56	9	22	228	2.6	4.6	2.3
50	40	281489	50	59.6	101.6	64.5	74	15	32	260	2.5	5	4.5
65	25	281490	65	76.1	121.0	80.3	88	15	32	280	2.9	5	5.5
80	25	281491	80	88.9	146.0	94.5	102	15	36	312	3.2	6	10.1
100	25	281492	100	114.0	177.8	122.1	123	19	41	349	3.5	7.5	18.0
125	25	281493	125	139.7	219.1	151.7	143	19	41	363	5.6	10	29.9
150	25	281494	125	168.3	219.1	151.7	143	19	41	365	4,5	10,4	29.9

*DN 150 reduced bore