

Underground ball valves, reduced bore


Air release valve / Long, female threads / welding EN (DIN), DN 20-50, reduced bore

Body	DN 20-50 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Extension Pipe	DN 20-50 Steel, P235GH (1.0345)
Ball	DN 20-50 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 20-50 PTFE+C
Stem	DN 20-50 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 20-50 FPM/NBR
Plug	DN 20-50 DZR brass
Equipment	DN 20-50 are equipped with plug




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

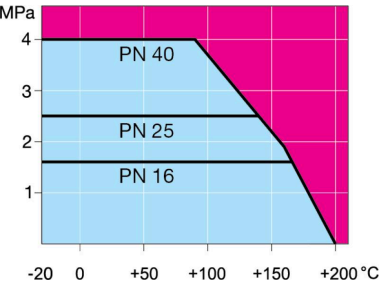

Not for steam

DN 20-50

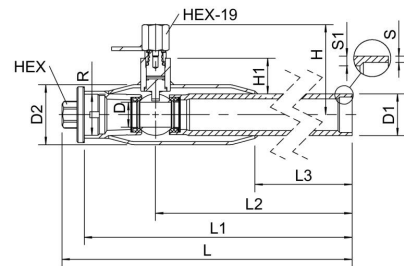

DN	PN	Product no.	D	D1	D2	H	H1	HEX	HEX19	L	L1	L2	L3	R	S	S1	kg
20	25	286035L	15	26.9	42.4	63	21	19	19	500	484	434	351		2,6	4	1.5
25	25	286036L	20	33.7	48.3	73	27	19	19	500	482	425	342		2,6	4	1.9
32	25	286037L	25	42.4	60.3	76	25	19	19	500	479	414	305		3,2	4,5	2.8
40	25	286038L	32	48.3	70.0	84	31	27	19	500	479	403	299		3,7	4,5	3.3
50	25	28603977	40	60.3	88.9	93	32	27	19	500	476	386	278		2,9	4	4.0