

Balancing valves, steel, reduced bore


140 trim series, welding / welding, EN (DIN), DN 350-400, reduced bore

Body	DN 350-400 Steel, P235GH (1.0345)
Ball	DN 350-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 350-400 PTFE+GF
Stem	DN 350-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 350-400 FPM
Measuring block	DN 350-400 Self-sealing, brass / EPDM
Operation	DN 350-400 Valve is equipped with manual gear




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

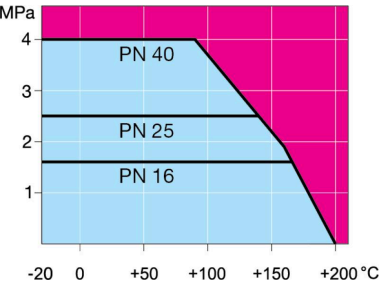


Not for steam

DN 350-400

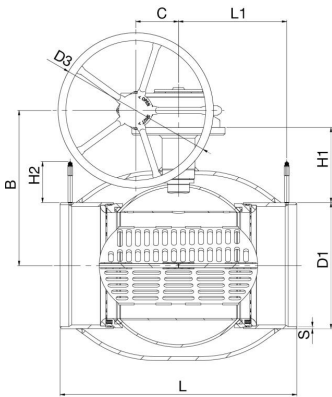

DN 350-400

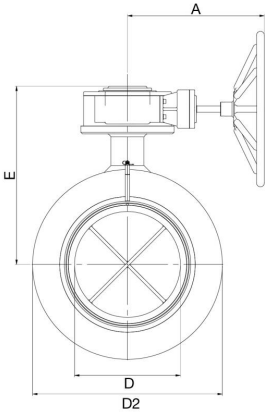

DN	PN	Product no.	A	B	C	D	D1	D2	D3	E	H1	H2	L	L1	S	kg
350	25	140350	424	424	138	290	355.6	508.0	600.0	498	192	132	686	305	6,3	220.0
400	25	140400	440	500	138	340	406.4	610.0	500.0	573	242	132	762	349	7	340.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.