

Stainless steel ball valves, reduced bore


PN 25, flange / flange, DN 100-250, reduced bore

Body	DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 100-250 PTFE+C
Stem	DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 100-250 FPM/NBR
Operation	DN 100-250 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

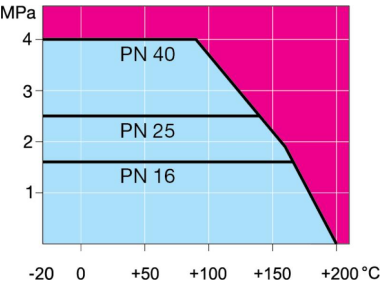


Not for steam

DN 100-250

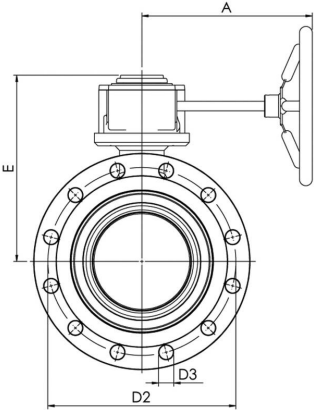

DN 100-250

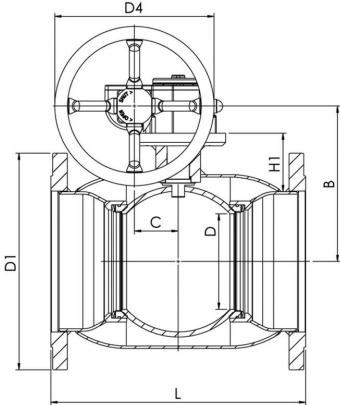

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
100	25	286522	187	159	53	80	235.0	190.0	22.0	125.0	202	68	300	28.0
125	25	286523	224	183	53	100	270.0	220.0	26.0	200.0	225	79	325	34.0
150	25	286524	224	203	53	125	300.0	250.0	26.0	200.0	246	85	350	40.0
200	25	286526	268	244	69	150	360.0	310.0	26.0	250.0	293	92	400	66.0
250	25	286527	301	294	97	200	425.0	370.0	30.0	300.0	345	108	550	120.0