

Stainless steel ball valves, reduced bore


234xx1/25 series, PN 25, flange / flange, DN 100-250, reduced bore

Body	DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 100-250 PTFE+C
Stem	DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 100-250 FPM/NBR
Operation	DN 100-250 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

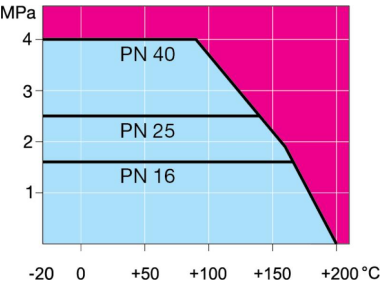


Not for steam

DN 100-250

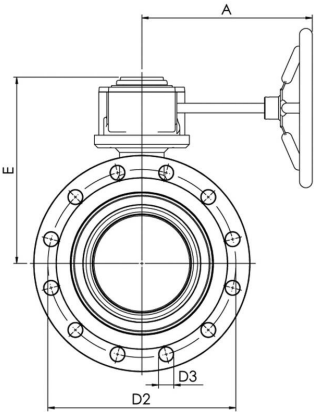

DN 100-250

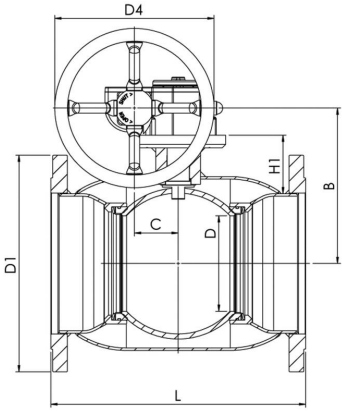

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
100	25	234101/25	187	159	53	80	235.0	190.0	22.0	125.0	202	68	300	28.0
125	25	234126/25	224	183	53	100	270.0	220.0	26.0	200.0	225	79	325	34.0
150	25	234151/25	224	203	53	125	300.0	250.0	26.0	200.0	246	85	350	40.0
200	25	234201/25	268	244	69	150	360.0	310.0	26.0	250.0	293	92	400	66.0
250	25	234251/25	301	294	97	200	425.0	370.0	30.0	300.0	345	108	550	120.0