

Stainless steel ball valves, reduced bore


PN 25, flange / flange, DN 65-250, reduced bore

Body	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-250 PTFE+C
Stem	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-250 FPM/NBR
Operation	DN 65-250 With zinc-plated steel handle
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

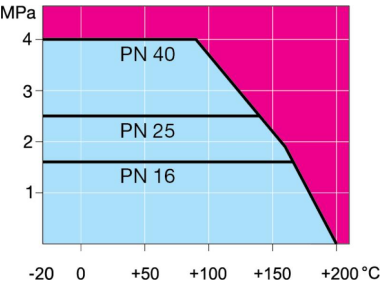


Not for steam

DN 65-150

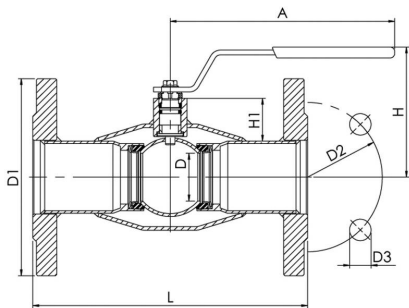

DN 200-250



DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	kg
65	25	286570	278	50	185.0	145.0	18.0	148	51	270	11.0
80	25	286571	278	65	200.0	160.0	18.0	159	58	280	13.3
100	25	286572	278	80	235.0	190.0	22.0	171	54	300	18.9
125	25	286573	400	100	270.0	220.0	26.0	220	68	325	27.7
150	25	286574	600	125	300.0	250.0	26.0	240	74	350	35.9
200	25	286576	870	150	360.0	310.0	26.0	280	92	400	59.0
250	25	286577	1200	200	425.0	370.0	30.0	340	108	550	105.0