


Steel ball valves, reduced bore


high, welding / welding, EN (DIN), DN 10-50, reduced bore

Body	DN 10-50 Steel, P235GH (1.0345)
Ball	DN 10-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 10-50 PTFE+C
Stem	DN 10-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 10-50 FPM
Operation	DN 10-50 With zinc-plated steel handle

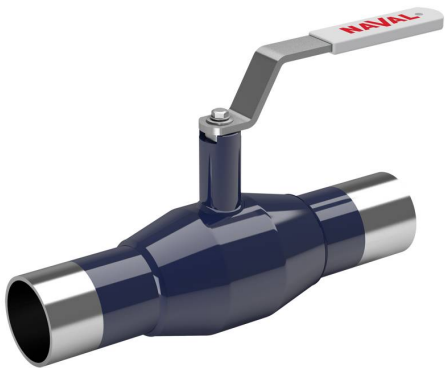


Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

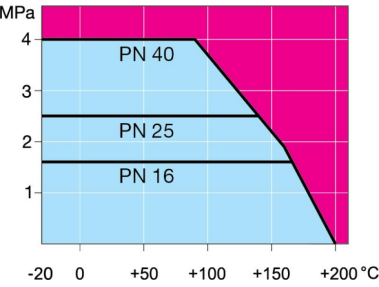

Not for steam

DN 10-50

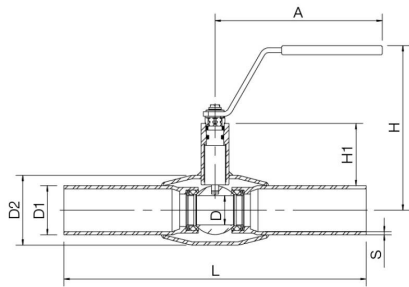

DN	PN	Product no.	A	D	D1	D2	H	H1	L	kg
10	40	284462	145	10	17.2	33.7	128	52	230	0.7
15	40	284463	145	10	21.3	33.7	128	52	230	0.7
20	40	284465	145	15	26.9	42.4	133	53	230	0.9
25	40	284466	145	20	33.7	48.3	139	55	230	1.0
32	40	284467	145	25	42.4	60.3	142	54	260	1.5
40	40	284468	188	32	48.3	70.0	139	62	260	1.8
50	40	284469	188	40	60.3	88.9	146	63	300	2.7