

Steel ball valves, reduced bore


high, female threads / female threads, DN 10-50, reduced bore

Body	DN 10-50 Steel, P235GH (1.0345)
Ball	DN 10-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 10-50 PTFE+C
Stem	DN 10-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 10-50 FPM
Operation	DN 10-50 With zinc-plated steel handle




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

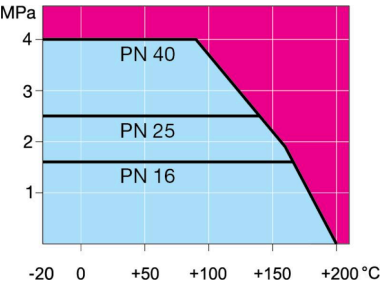

Not for steam

DN 10-50

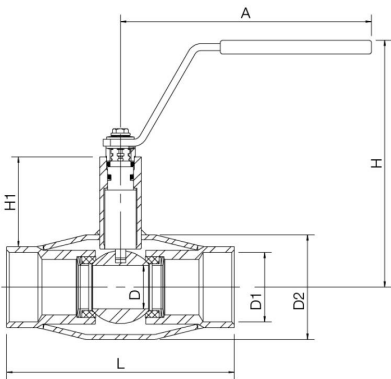

DN	PN	Product no.	A	D	D1	D2	H	H1	L	kg
10	40	284162	145	10	Rp 3/8	33.7	128	49	75	0.5
15	40	284163	145	10	Rp 1/2	33.7	128	49	85	0.5
20	40	284165	145	15	Rp 3/4	42.4	133	51	100	0.5
25	40	284166	145	20	Rp 1	48.3	139	53	115	0.8
32	40	284167	145	25	Rp 1 1/4	60.3	142	52	130	1.1
40	40	284168	188	32	Rp 1 1/2	70.0	139	59	150	1.6
50	40	284169	188	40	Rp 2	88.9	146	60	180	2.3