

X-gas ball valves, full bore


309X series, X-series, flange / flange, DN 15-40, full bore

Body	DN 15-40 Steel, P235GH (1.0345)
Ball	DN 15-40 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-40 PTFE+C
Stem	DN 15-40 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-40 FPM/NBR
Operation	DN 15-40 with composite handle
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions

-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

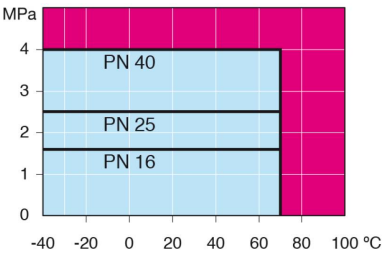

DN 15-40

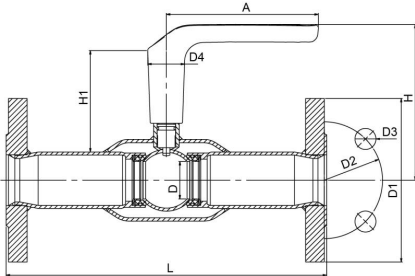

Not for steam

DN	PN	Product no.	A	D	D1	D2	D3	D4	H	H1	L	kg
15	40	309015X	130	15	95.0	65.0	14.0	32.0	123	87	245	2.5
20	40	309020X	130	20	105.0	75.0	14.0	32.0	125	86	245	3.0
25	40	309025X	130	25	115.0	85.0	14.0	32.0	129	85	275	4.0
32	40	309032X	130	32	140.0	100.0	18.0	32.0	133	87	275	5.5
40	40	309040X	130	40	150.0	110.0	18.0	32.0	140	88	320	6.8