


Stainless steel ball valves, reduced bore


welding / welding, NS-norm, DN 65-100, reduced bore

Body	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-100 PTFE+C
Stem	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-100 FPM/NBR
Operation	DN 65-100 With zinc-plated steel handle

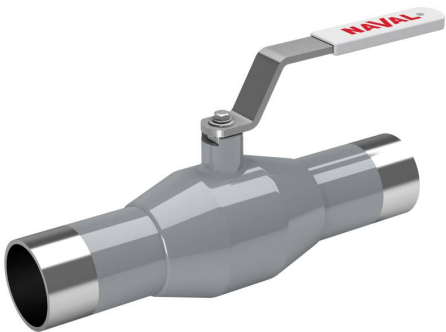


Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

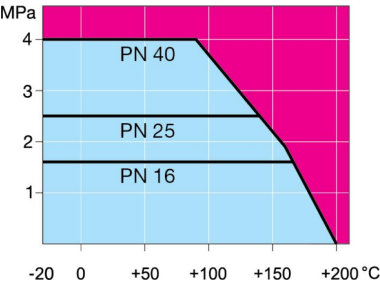

Not for steam

DN 65-150

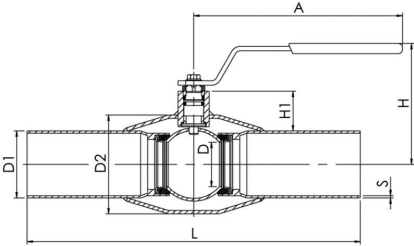

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
65	25	286330	278	50	70.0	114.3	150	55	300	3,0	3.8
80	25	286331	278	65	86.0	114.3	160	59	300	3,1	4.7
100	25	286332	278	80	106.0	139.7	171	59	325	3,0	6.7