


Stainless steel ball valves, reduced bore


230/MM series, welding / welding, NS-norm, DN 65-100, reduced bore

Body	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-100 PTFE+C
Stem	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-100 FPM/NBR
Operation	DN 65-100 With zinc-plated steel handle

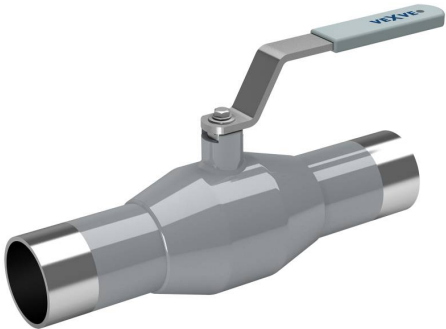


Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

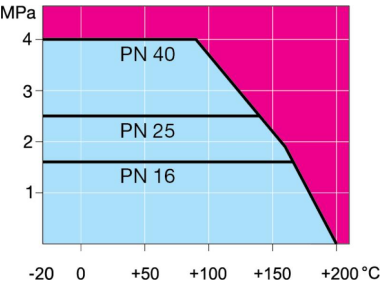

Not for steam

DN 65-150

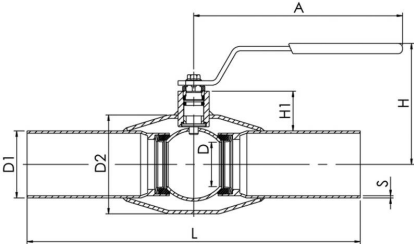

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
65	25	230065/MM	278	50	70.0	114.3	150	55	300	3,0	3.8
80	25	230080/MM	278	65	86.0	114.3	160	59	300	3,1	4.7
100	25	230100/MM	278	80	106.0	139.7	171	59	325	3,0	6.7