

X-steel ball valves, full bore


153X series, X-series, flange / flange, DN 15-40, full bore

Body	DN 15-40 Steel, P235GH (1.0345)
Ball	DN 15-40 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-40 PTFE+C
Stem	DN 15-40 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-40 FPM
Operation	DN 15-40 with composite handle
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions

-20 ° – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

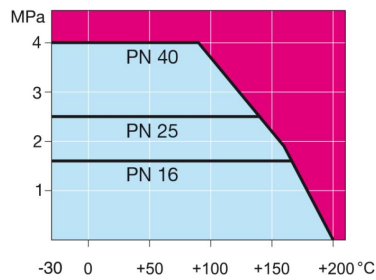

DN 15-40

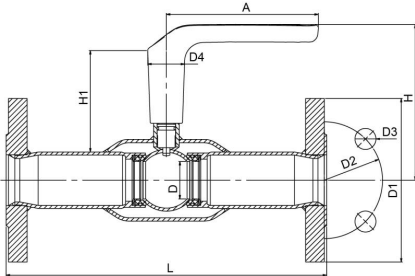

DN	PN	Product no.	A	D	D1	D2	D3	D4	H	H1	L	kg
15	40	153015X	130	15	95.0	65.0	14.0	32.0	123	87	245	2.5
20	40	153020X	130	20	105.0	75.0	14.0	32.0	125	86	245	3.0
25	40	153025X	130	25	115.0	85.0	14.0	32.0	129	85	275	4.0
32	40	153032X	130	32	140.0	100.0	18.0	32.0	133	87	275	5.5
40	40	153040X	130	40	150.0	110.0	18.0	32.0	140	88	320	6.8