


Gas ball valves, reduced bore

112 series, female threads / female threads, DN 15-50, reduced bore

Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+C
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 NBR
Operation	DN 15-50 With zinc-plated steel handle




Operation conditions
-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

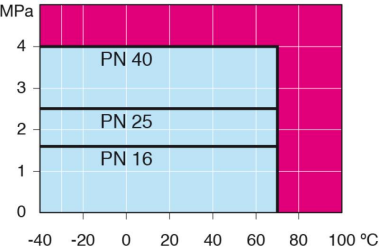

Not for steam

DN 15-50

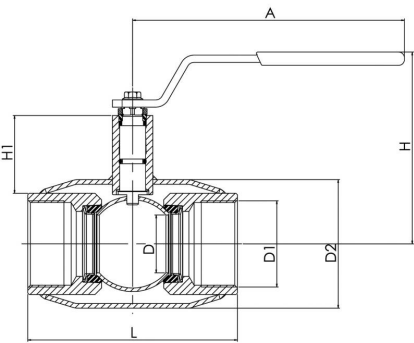

DN	PN	Product no.	A	D	D1	D2	H	H1	L	kg
15	40	112015	145	10	Rp 1/2	33.7	98	22	85	0.5
20	40	112020	145	15	Rp 3/4	42.4	103	23	100	0.6
25	40	112025	145	20	Rp 1	48.3	118	34	115	1.0
32	40	112032	145	25	Rp 1 1/4	60.3	121	33	130	1.2
40	40	112040	188	32	Rp 1 1/2	70.0	120	43	150	1.8
50	40	112050	188	40	Rp 2	88.9	127	44	180	2.3