



X-balancing valves, steel, reduced bore

140X series, X-series, welding / welding, EN (DIN), DN 15-50, reduced bore

Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301), flowtube composite
Ball seal	DN 15-50 PTFE+GF
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 FPM
Measuring block	DN 15-50 Self-sealing, brass / EPDM
Operation	DN 15-50 with precision control knob

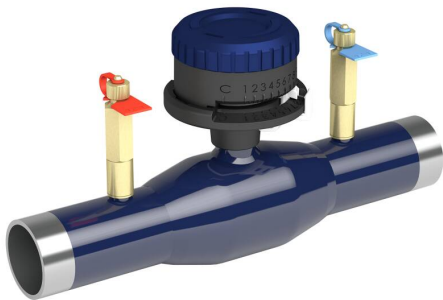


Operation conditions
-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

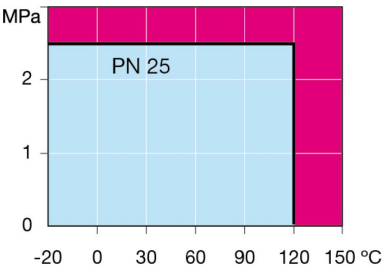

Not for steam

DN 15-50

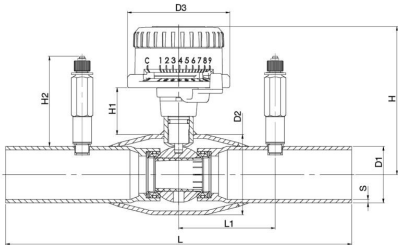

DN	PN	Product no.	D1	D2	D3	H	H1	H2	L	L1	S	kg
15	25	140015X	21.3	33.7	77.0	101	38.5	68	230	73	2	0.8
20	25	140020X	26.9	42.4	77.0	105	38	68	230	73	2.3	1.0
25	25	140025X	33.7	48.3	77.0	107	37	68	230	73	2.6	1.1
32	25	140032X	42.4	60.3	77.0	111	35	68	260	73	2.6	1.5
40	25	140040X	48.3	70.0	77.0	116	35	68	260	73	2.6	1.7
50	25	140050X	60.3	76.1	77.0	123	39	68	300	73	2.9	2.3

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.