



Condensate valves, reduced bore

171 series, female threads / welding EN (DIN), DN 15-50, reduced bore


Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+GF
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 Graphite
Operation	DN 15-50 With zinc-plated steel handle

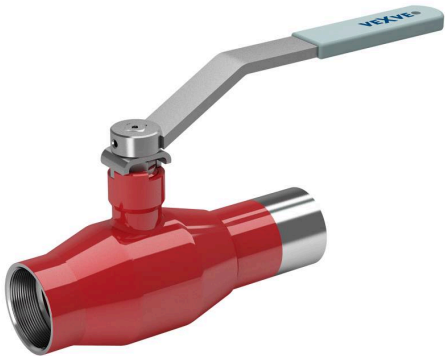

Operation conditions
DN 15-150: -20 °C – +250 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
*) Not for superheated steam
Leakage rate A (EN 12266-1)

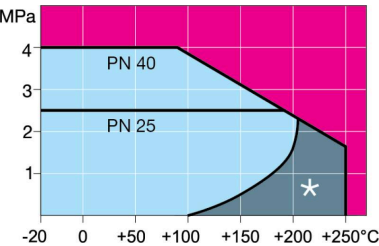

DN 15-50

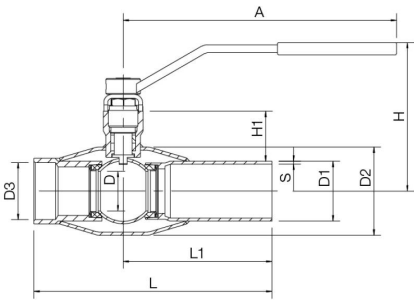

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	L1	S	kg
15	40	171015	145	10	21.3	33.7	Rp 1/2	117	31	158	115	2	0.7
20	40	171020	145	15	26.9	42.4	Rp 3/4	122	33	168	117	2,3	0.8
25	40	171025	145	20	33.7	48.3	Rp 1	138	46	172	115	2,6	1.2
32	40	171032	145	25	42.4	60.3	Rp 1 1/4	142	45	195	130	2,6	1.5
40	40	171040	276	32	48.3	70.0	Rp 1 1/2	143	50	205	130	2,6	2.5
50	40	171050	276	40	60.3	88.9	Rp 2	150	50	240	150	2,9	3.4