


Control and shut-off butterfly valves, reduced bore

BRC W2 series, Δp = 25 bar, welding / welding, EN (DIN), DN 900-1200, reduced bore


Body	DN 900-1200 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408) DN 1200 Stainless steel, GX2CrNiMoN22-5-3 (1.4470)
Seat	DN 900-1200 1.4542 + HCr plating
Stem	DN 900-1200 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1200 Graphite
Bearing	DN 900-1200 PTFE + AISI 316 net
Operation	DN 900-1200 Valve is equipped with manual gear

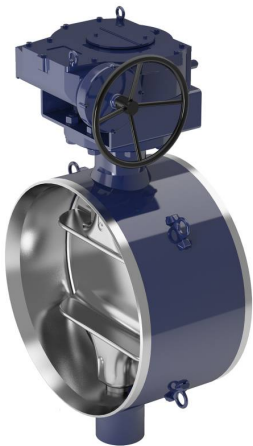


Operation conditions

Body:	PN 25
Trim:	Δp = 25 bar
Temperature:	-40 °C – +250 °C
DN1200:	-20 °C – +200 °C Below 0 °C contact manufacturer
Leakage rate:	A or B (EN 12266-1) Depending on requirement

DN 900-1200

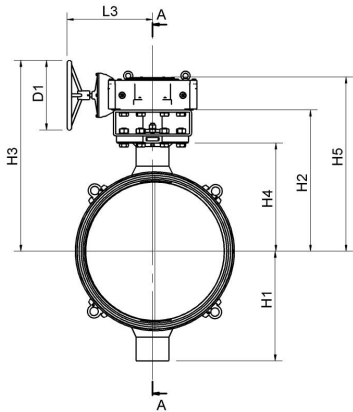

DN 900-1200

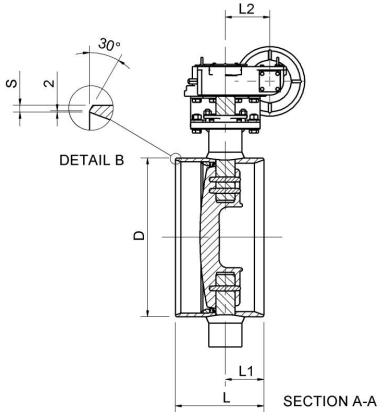

DN	PN	Product no.	D	D1	H1	H2	H3	H4	H5	L	L1	L2	L3	S	kg
900	25	BRC900W2	914	400.0	631	813	1098	623	1003	510	221	256	505	10	1170.0
1000	25	BRC1000W2	1016	400.0	678	879	1164	689	1069	550	224	256	506	10	1509.0
1200	25	BRC1200W2	1219	500.0	730	1043	1423	856	1304	580	285	250	632	15	2344.0