

Shut-off butterfly valves, reduced bore

BRS F2 series, Δp = 25 bar, flange / flange, DN 900-1000, reduced bore


Body	DN 900-1000 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1000 1.4542 + HCr plating
Stem	DN 900-1000 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1000 FPM
Bearing	DN 900-1000 PTFE + AISI 316 net
Operation	DN 900-1000 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 25




Operation conditions

Body:	PN 25
Trim:	Δp = 25 bar
Temperature:	-40 °C – +200 °C Below 0 °C contact manufacturer
Leakage rate:	A or B (EN 12266-1) Depending on requirement
Not for steam	

DN 900-1000

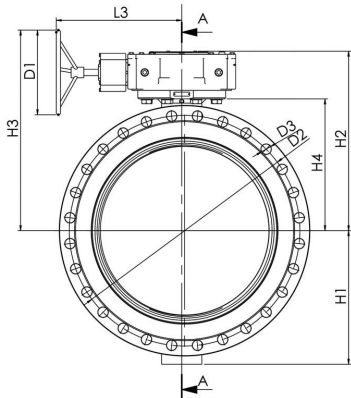

DN 900-1000

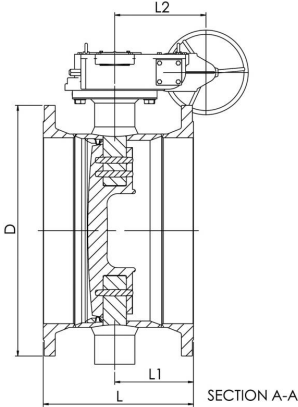

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	L	L1	L2	L3	kg
900	25	BRS900F2	1185	400.0	1090.0	48.0	631	853	948	623	814	374	256	505	1620.0
1000	25	BRS1000F2	1320	400.0	1210.0	56.0	678	919	1014	689	878	388	256	506	2204.0