

Trunnion mounted ball valves, full bore


154/TR series, welding / welding, EN (DIN), DN 150-1200, full bore

Body	DN 150-400 Steel, P355QH (1.0571) / P355NL1 (1.0566) DN 450-1200 Steel, P355QH (1.0571) / P355NH (1.0565)
Ball	DN 150-1200 Steel + stainless plating, ASTM A350 LF2 +Ni
Ball seal	DN 150-1200 PTFE+C
Stem	DN 150-1200 Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 150-1200 FPM
Operation	DN 150-1200 Valve is equipped with manual gear
Structural length	EN 12982 (63-series)
Equipment	DN 150-1200 are equipped with lifting lugs, mounting stand, Drain valve: DN 20 for DN 150-400 valves, DN 32 for DN 450-1200 valves



Operation conditions

0 °C – +200 °C
Below 0 °C contact manufacturer
Lowest allowed ambient
temperature -20 °C
Leakage rate A (EN 12266-1)

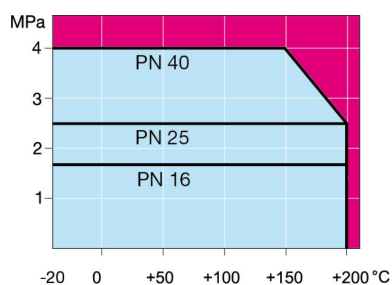

Not for steam

DN 150-1200

