


Condensate valves, reduced bore

174 series, welding / welding, EN (DIN), DN 125-150, reduced bore


Body	DN 125-150 Steel, P235GH (1.0345)
Ball	DN 125-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 125-150 PTFE+GF
Stem	DN 125-150 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 125-150 KALREZ/EPDM
Operation	DN 125-150 Valve is equipped with manual gear




Operation conditions
DN 15–150: -20 °C – +250 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
*) Not for superheated steam
Leakage rate A (EN 12266-1)

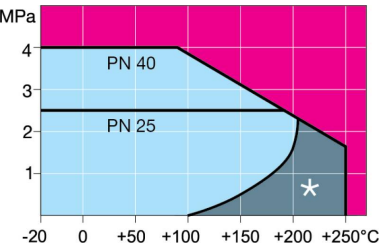

DN 125-250

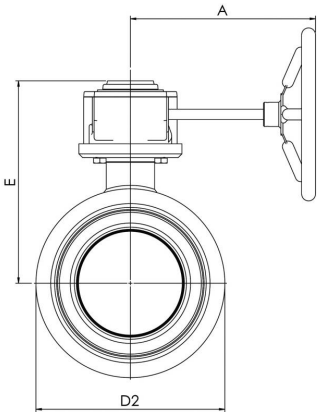

DN 125-250

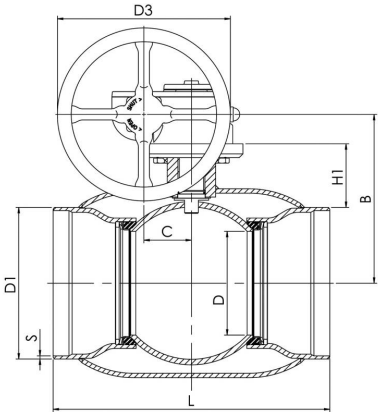

DN	PN	Product no.	A	B	C	D	D1	D2	D3	E	H1	L	S	kg
125	25	174125	224	217	53	100	139.7	177.8	200.0	259	113	325	4	20.0
150	25	174150	224	237	53	125	168.3	219.1	200.0	280	119	350	4,5	25.0