

Steel ball valves, reduced bore


strong, welding / welding, EN (DIN), DN 65-200, reduced bore

Body	DN 65-200 Steel, P235GH (1.0345)
Ball	DN 65-200 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 65-200 PTFE+C
Stem	DN 65-200 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 65-200 FPM
Operation	DN 65-200 With zinc-plated steel handle




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

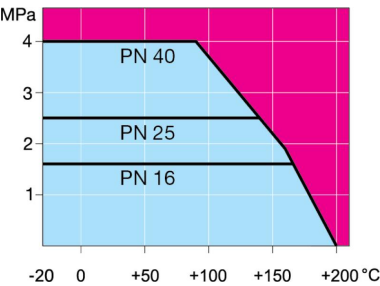


Not for steam

DN 65-150

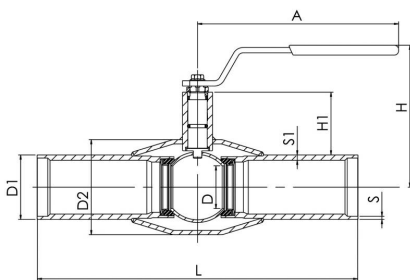

DN 200



DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	S1	kg
65	25	254410	280	50	76.1	101.6	159	62	300	2.9	5	5.0
80	25	254411	280	65	88.9	121.0	171	68	300	3,2	5.6	6.5
100	25	254412	280	80	114.3	139.7	216	101	325	3.6	6.3	10.4
125	25	254413	400	100	139.7	177.8	253	101	325	4	6.3	14.0
150	25	254414	400	125	168.3	219.1	272	107	350	4.1	7.1	22.0
200	25	254416	870	150	219.1	273.0	281	92	400	4.5	7.1	43.0