


Stainless steel ball valves, reduced bore


230 series, welding / welding, EN (DIN), DN 65-250, reduced bore

Body	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-250 PTFE+C
Stem	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-250 FPM/NBR
Operation	DN 65-250 With zinc-plated steel handle

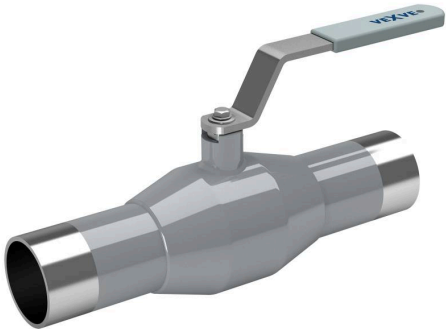

Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C


Leakage rate A (EN 12266-1)

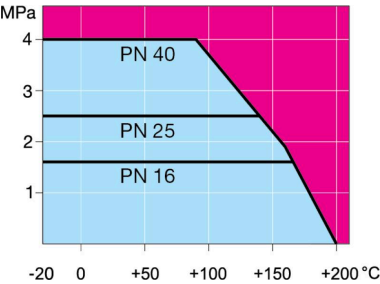

Not for steam

DN 65-150

DN 200-250

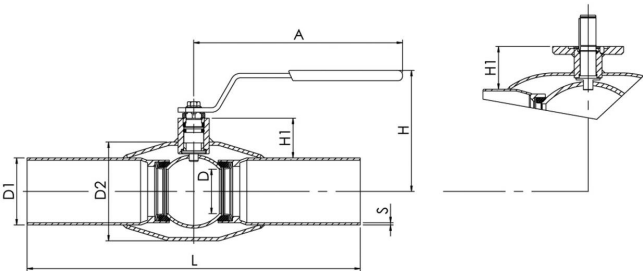

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
65	25	230065	278	50	76.1	114.3	150	51	300	3,0	3.8
80	25	230080	278	65	88.9	114.3	160	58	300	3,0	4.7
100	25	230100	278	80	114.3	139.7	175	54	325	3,0	6.7
125	25	230125	400	100	139.7	177.8	220	68	325	4	13.0
150	25	230150	600	125	168.3	219.1	240	74	350	4	18.0
200	25	230200	870	150	219.1	273.0	280	92	400	4	32.0
250	25	230250	1200	200	273.0	355.6	340	108	530	4	63.0