

Balancing valves, steel, reduced bore

PN 25, flange / flange, DN 65-150, reduced bore

Body	DN 65-150 Steel, P235GH (1.0345)
Ball	DN 65-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 65-150 PTFE+GF
Stem	DN 65-150 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 65-150 FPM
Measuring block	DN 65-150 Type Oras, brass / NBR
Operation	DN 65-150 With zinc-plated steel handle
Flanges	EN 1092-1
	Available PN 10, 16, 25, 40




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)



Not for steam

DN 65-150

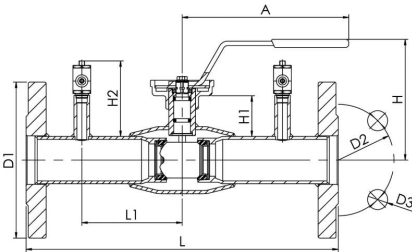

DN	PN	Product no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	25	265570V	280	185.0	145.0	18.0	160	58	108	310	110	11.0
80	25	265571V	280	200.0	160.0	18.0	173	64	108	310	110	14.0
100	25	265572V	280	235.0	190.0	22.0	219	98	132	350	122.5	20.7
125	25	265573V	400	270.0	220.0	26.0	253	100	130	360	137,5	31.3
150	25	265574V	600	300.0	250.0	26.0	276	110	131	390	150	40.7

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.

Balancing valves, steel, reduced bore

PN 25, flange / flange, DN 200-300, reduced bore


Body	DN 200-300 Steel, P235GH (1.0345)
Ball	DN 200-300 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 200-300 PTFE+GF
Stem	DN 200-300 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 200-300 FPM
Measuring block	DN 200-300 Type Oras, brass / NBR
Operation	DN 200-300 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 10, 16, 25, 40



Operation conditions


-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

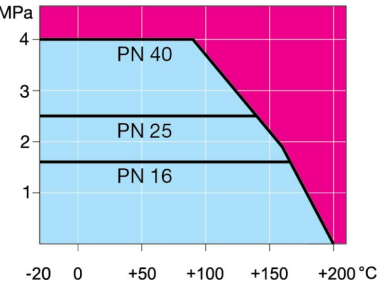


Not for steam

DN 200-300



DN 200-300



DN	PN	Product no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	25	265576V	268	244	69	360.0	310.0	26.0	250.0	293	72	101	101	425	195	74.0
250	25	265577V	301	294	97	425.0	370.0	30.0	300.0	345	88	107	107	550	256	120.0
300	25	265578V	424	349	138	485.0	430.0	30.0	600.0	422	112	112	112	580	296	176.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.