

Balancing valves, steel, reduced bore

PN 25, flange / flange, DN 350-400, reduced bore

Body	DN 350-400 Steel, P235GH (1.0345)
Ball	DN 350-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 350-400 PTFE+GF
Stem	DN 350-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 350-400 FPM
Measuring block	DN 350-400 Self-sealing, brass / EPDM
Operation	DN 350-400 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 25




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)




Not for steam

DN 350-400

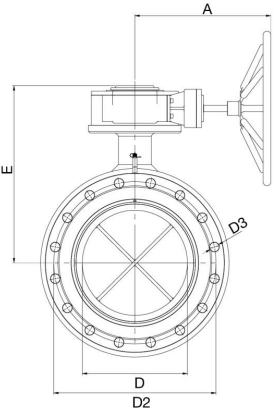

DN 350-400

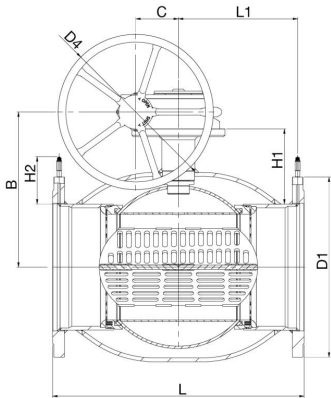

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	H2	L	L1	kg
350	25		424	424	138	290	555.0	490.0	33.0	600.0	498	192	165	706	334	300.0
400	25	265579	444	500	138	340	620.0	550.0	36.0	500.0	573	242	172	810	379	424.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.