

Balancing valves, steel, reduced bore


140 trim F/F series, PN 25, flange / flange, DN 350-400, reduced bore

Body	DN 350-400 Steel, P235GH (1.0345)
Ball	DN 350-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 350-400 PTFE+GF
Stem	DN 350-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 350-400 FPM
Measuring block	DN 350-400 Self-sealing, brass / EPDM
Operation	DN 350-400 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 25




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

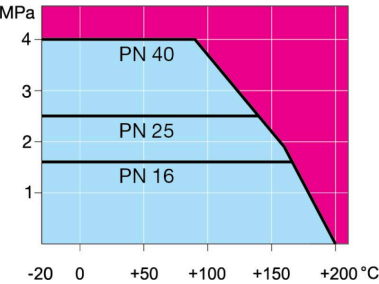


Not for steam

DN 350-400

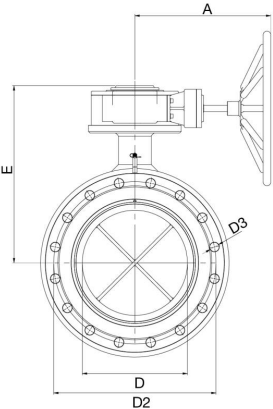

DN 350-400

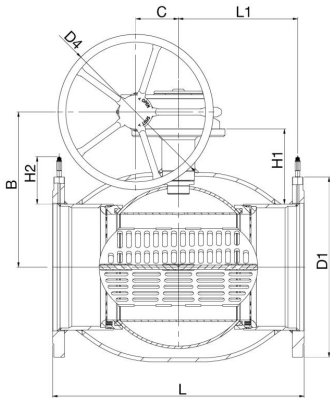

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	H2	L	L1	kg
350	25	143350/25	424	424	138	290	555.0	490.0	33.0	600.0	498	192	165	706	334	300.0
400	25	143400/25	444	500	138	340	620.0	550.0	36.0	500.0	573	242	172	810	379	424.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.