

Steel ball valves, full bore


PN 25, flange / flange, DN 100-400, full bore

Body	DN 100-400 Steel, P235GH (1.0345)
Ball	DN 100-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 100-400 PTFE+C
Stem	DN 100-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 100-400 FPM
Operation	DN 100-400 Valve is equipped with manual gear




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

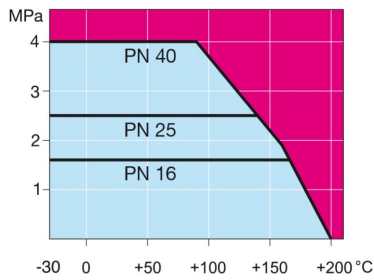


Not for steam

DN 100-400

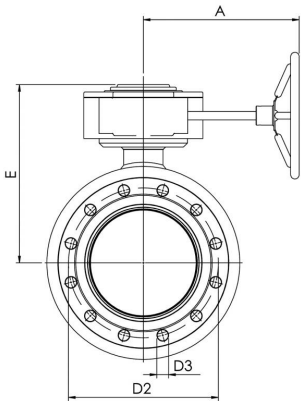

DN 100-400

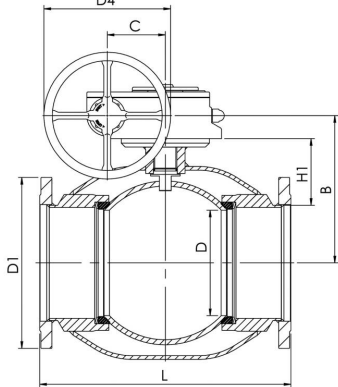

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
100	25	235592	224	216	53	100	235.0	190.0	22.0	200.0	258	124	350	34.0
125	25	235593	224	236	53	125	270.0	220.0	26.0	200.0	279	132	375	45.0
150	25	235594	268	244	69	150	300.0	250.0	26.0	250.0	293	117	555	86.0
200	25	235596	301	294	97	200	360.0	310.0	26.0	300.0	345	135	560	130.0
250	25	235597	363	343	117	250	425.0	370.0	30.0	500.0	412	158	595	206.0
300	25	235598	363	418	117	290	485.0	430.0	30.0	500.0	487	205	716	266.0
350	25	235595	440	500	138	340	555.0	490.0	33.0	500.0	573	261	802	415.0
400	25	235579	471	576	180	390	620.0	550.0	36.0	500.0	648	306	1140	713.0