

Balancing valves, steel, reduced bore

140 trim F/F series, flange / flange, DN 350-400, reduced bore

Body	DN 350-400 Steel, P235GH (1.0345)
Ball	DN 350-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 350-400 PTFE+GF
Stem	DN 350-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 350-400 FPM
Measuring block	DN 350-400 Self-sealing, brass / EPDM
Operation	DN 350-400 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 16




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)




Not for steam

DN 350-400

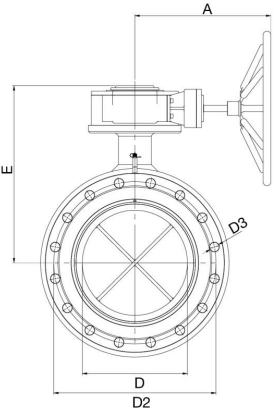

DN 350-400

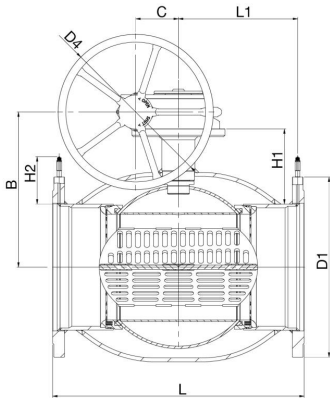

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	H2	L	L1	kg
350	16	143350	424	424	138	290	520.0	470.0	26.0	600.0	498	192	148	706	334	275.0
400	16	143400	440	500	138	340	580.0	525.0	30.0	500.0	573	242	152	810	384	382.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.