


Condensate valves, reduced bore

174xx1/25 series, PN 25, flange / flange, DN 125-150, reduced bore


Body	DN 125-150 Steel, P235GH (1.0345)
Ball	DN 125-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 125-150 PTFE+GF
Stem	DN 125-150 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 125-150 KALREZ/EPDM
Operation	DN 125-150 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions
DN 15-150: -20 °C – +250 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
*) Not for superheated steam
Leakage rate A (EN 12266-1)

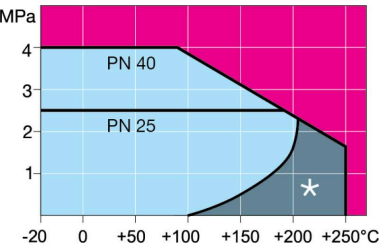

DN 125-250

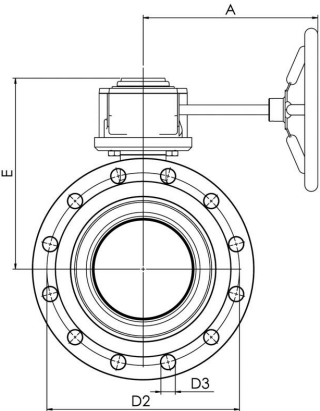

DN 125-250

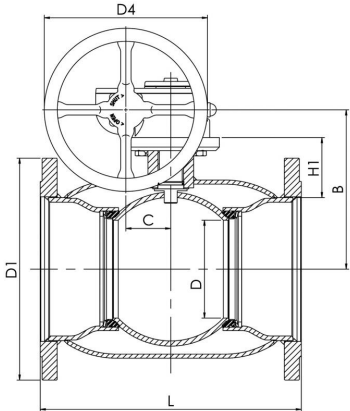

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
125	25	174126/25	224	216	53	100	270.0	220.0	26.0	200.0	258	112	325	35.0
150	25	174151/25	224	236	53	125	300.0	250.0	26.0	200.0	279	118	350	44.0