


# Condensate valves, reduced bore

welding / welding, EN (DIN), DN 15-150, reduced bore


|           |                                                 |
|-----------|-------------------------------------------------|
| Body      | DN 15-150 Steel, P235GH (1.0345)                |
| Ball      | DN 15-150 Stainless steel, X5CrNi18-10 (1.4301) |
| Ball seal | DN 15-150 PTFE+GF                               |
| Stem      | DN 15-150 Stainless steel, X8CrNiS18-9 (1.4305) |
| Stem seal | DN 15-50 Graphite                               |
|           | DN 65-150 KALREZ/EPDM                           |
| Operation | DN 15-150 With zinc-plated steel handle         |



Operation conditions  
DN 15-150: -20 °C – +250 °C  
Below -20 °C contact manufacturer  
Lowest allowed ambient temperature -40 °C  
\*) Not for superheated steam  
Leakage rate A (EN 12266-1)

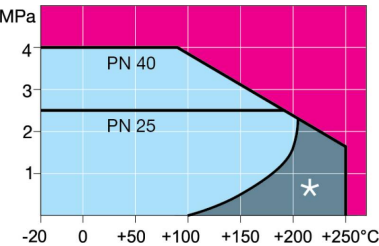

DN 15-150

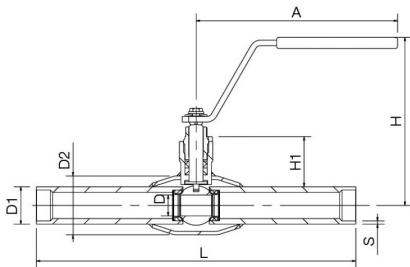

| DN  | PN | Product no. | A   | D   | D1    | D2    | H   | H1  | L   | S   | kg   |
|-----|----|-------------|-----|-----|-------|-------|-----|-----|-----|-----|------|
| 15  | 40 | 274403      | 145 | 10  | 21.3  | 33.7  | 117 | 31  | 230 | 2,0 | 0.7  |
| 20  | 40 | 274405      | 145 | 15  | 26.9  | 42.4  | 121 | 33  | 230 | 2,3 | 0.9  |
| 25  | 40 | 274406      | 145 | 20  | 33.7  | 48.3  | 139 | 46  | 230 | 2,6 | 1.4  |
| 32  | 40 | 274407      | 145 | 25  | 42.4  | 60.3  | 142 | 45  | 260 | 2,6 | 1.6  |
| 40  | 40 | 274408      | 276 | 32  | 48.3  | 70.0  | 143 | 50  | 260 | 2,6 | 2.5  |
| 50  | 40 | 274409      | 276 | 40  | 60.3  | 88.9  | 150 | 50  | 300 | 2,9 | 3.4  |
| 65  | 25 | 274410      | 278 | 50  | 76.1  | 101.6 | 159 | 61  | 300 | 2,9 | 4.1  |
| 80  | 25 | 274411      | 278 | 65  | 88.9  | 121.0 | 171 | 68  | 300 | 3,2 | 5.4  |
| 100 | 25 | 274412      | 278 | 80  | 114.3 | 146.0 | 218 | 100 | 325 | 3,6 | 8.5  |
| 125 | 25 | 274453      | 400 | 100 | 139.7 | 177.8 | 253 | 101 | 325 | 4   | 15.2 |
| 150 | 25 | 274454      | 600 | 125 | 168.3 | 219.1 | 272 | 107 | 350 | 4,5 | 20.4 |