

Branching valves, reduced bore


Hot tapping valve, welding / welding, EN (DIN), DN 32-100, reduced bore

Body	DN 32-100 Stainless steel, AISI316L (1.4404)
Ball	DN 32-100 Stainless steel, AISI316L (1.4404)
Ball seal	DN 32-100 PTFE+C
Stem	DN 32-100 Stainless steel, AISI316L (1.4404)
Stem seal	DN 32-100 FPM/NBR
Operation	DN 32-100 With zinc-plated steel handle




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

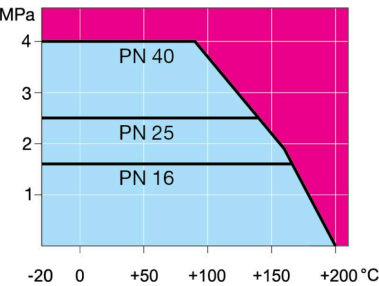

Not for steam

DN 32-100



DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
32	40	286487	145	25	42.4	60.3	115	27	260	2.0	1.4
40	40	286488	188	32	48.3	70.0	112	34	260	2.6	2.3
50	40	286489	188	40	60.3	88.9	119	34	300	2.6	3.5
65	25	286490	278	50	76.1	114.3	145	51	300	3.0	4.5
80	25	286491	278	65	88.9	131.0	157	58	300	3.0	6.4
100	25	286492	279	80	114.3	156.0	170	54	325	3.0	8.7