

Stainless steel ball valves, reduced bore

235 series, flange / welding, EN (DIN), DN 65-250, reduced bore

Body	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-250 PTFE+C
Stem	DN 65-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-250 FPM/NBR
Operation	DN 65-250 with stainless steel handle
Flanges	EN 1092-1 Available PN 16



Operation conditions

-20 °C – +200 °C

Below -20 °C contact manufacturer


Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)




Not for steam

DN 65-150

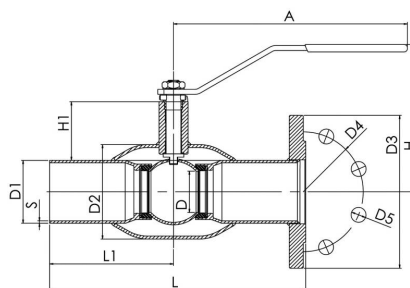

DN 200-250

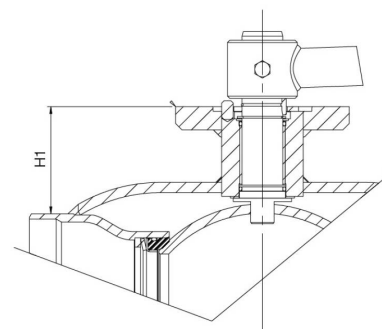

DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	kg
65	16	235065	278	50	76.1	114.3	185.0	145.0	18.0	150	51	310	150	3,0	6.7
80	16	235080	278	65	88.9	114.3	200.0	160.0	18.0	160	58	310	150	3,0	8.1
100	16	235100	278	80	114.3	139.7	220.0	180.0	18.0	175	54	340	163	3,0	12.6
125	16	235125	400	100	139.7	177.8	250.0	210.0	18.0	220	68	340	163	4,0	21.1
150	16	235150	600	125	168.3	219.1	285.0	240.0	22.0	240	74	360	198	4,0	29.9
200	16	235200	870	150	219.1	273.0	340.0	295.0	22.0	280	92	410	200	4,0	40.4
250	16	235250	1200	200	273.0	355.6	405.0	355.0	26.0	340	108	540	265	4,0	76.4