

Underground ball valves, reduced bore


107/TR/HG series, trunnion mounted long stem valve, welding / welding, EN (DIN), DN 200-900, reduced bore

Body	DN 200-450 Steel, P355QH (1.0571) / P355NL1 (1.0566) / P355NH (1.0565)
	DN 500-900 Steel, P355QH (1.0571) / P355NH (1.0565)
Ball	DN 200-900 Steel + stainless plating, ASTM A350 LF2 +Ni
Ball seal	DN 200-900 PTFE+C
Stem	DN 200-900 Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 200-900 FPM
Operation	DN 200-900 Valves are available with angle gear, standard hexagon adapter 27 or 32 mm
Top of stem	DN 200-900 Stainless steel, X5CrNi18-10 (1.4301)
Equipment	DN 200-900 are equipped with lifting lugs, mounting stand



Operation conditions

0 °C – +200 °C
Below 0 °C contact manufacturer
Lowest allowed ambient
temperature -20 °C
Leakage rate A (EN 12266-1)

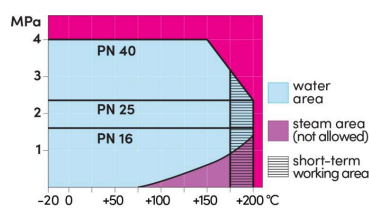

Not for steam

DN 200-900

