


Branching valves, full bore


126xx1 series, Hot tapping valve, flange / welding, EN (DIN), DN 150-200, full bore

Body	DN 150-200 Steel, P235GH (1.0345)
Ball	DN 150-200 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 150-200 PTFE+C
Stem	DN 150-200 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 150-200 FPM
Operation	DN 150-200 with socket wrench

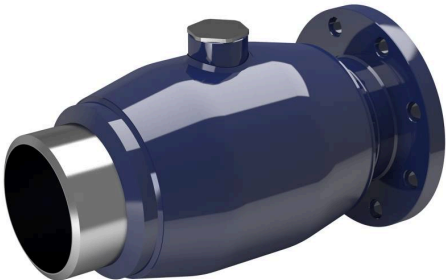


Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

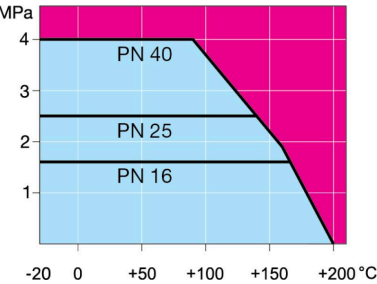

Not for steam

DN 150-200

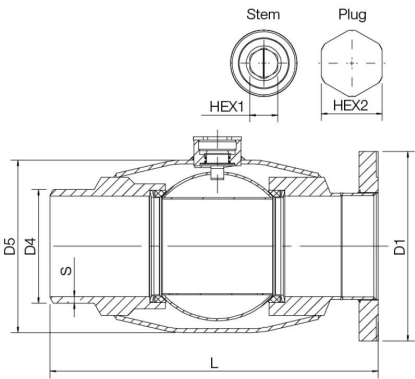

DN	PN	Product no.	D	D1	D2	D3	D4	D5	H	HEX1	HEX2	L	S	kg
150	25	126151	150	300.0	250.0	26.0	180.0	273.0	174	32	65	520	10,4	57.5
200	25	126201	150	360.0	310.0	26.0	180.0	273.0	173	32	65	523	10.4	57.0

*DN 200 reduced bore