



X-balancing valves, stainless steel, reduced bore

240X series, X-series, welding / welding, EN (DIN), DN 15-50, reduced bore

Body	DN 15-50 Stainless steel, AISI316L (1.4404)
Ball	DN 15-50 Stainless steel, AISI316L (1.4404), flowtube composite
Ball seal	DN 15-50 PTFE+GF
Stem	DN 15-50 Stainless steel, AISI316L (1.4404)
Stem seal	DN 15-50 FPM/NBR
Measuring block	DN 15-50 Self-sealing, stainless steel, X8CrNiS18-9 (1.4305) / EPDM
Operation	DN 15-50 with precision control knob

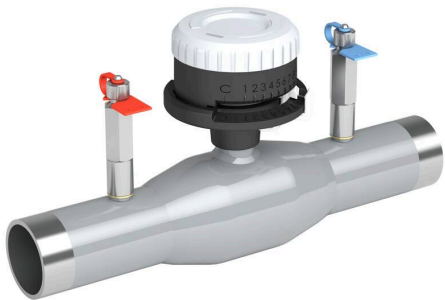


Operation conditions
-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

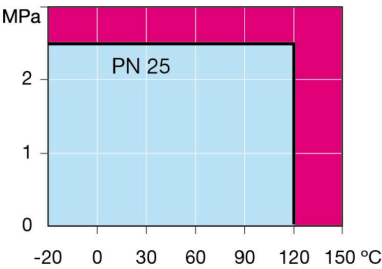

Not for steam

DN 15-50

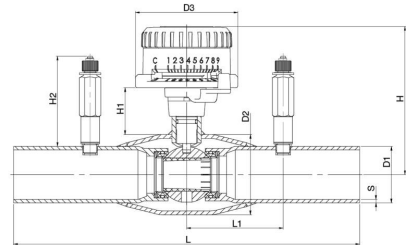

DN	PN	Product no.	D1	D2	D3	H	H1	H2	L	L1	S	kg
15	25	240015X	21.3	33.7	77.0	101	38.5	68	230	73	2	0.7
20	25	240020X	26.9	42.4	77.0	105	38	68	230	73	2	0.8
25	25	240025X	33.7	48.3	77.0	107	37	68	230	73	2	1.0
32	25	240032X	42.4	60.3	77.0	111	35	68	260	73	2	1.4
40	25	240040X	48.3	70.0	77.0	116	35	68	260	73	2.6	1.9
50	25	240050X	60.3	76.1	77.0	123	39	68	300	73	2.6	2.6

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.