

Stainless steel ball valves, full bore


250 series, welding / welding, EN (DIN), DN 50-125, full bore

Body	DN 50-125 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 50-125 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 50-125 PTFE+C
Stem	DN 50-125 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 50-125 FPM/NBR
Operation	DN 50-125 with stainless steel handle




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

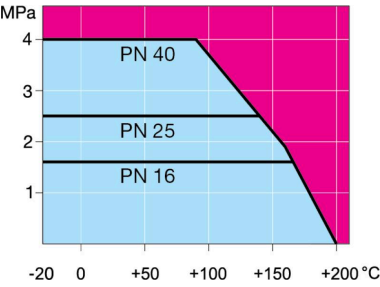

Not for steam

DN 50-80

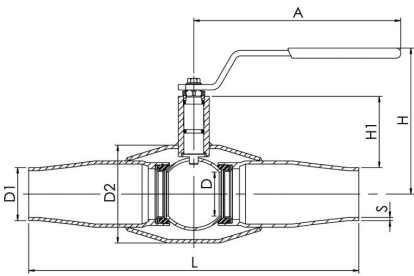

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
50	25	250050	278	50	60.3	114.3	147	59	300	3,0	3.7
65	25	250065	278	65	76.1	131.0	160	64	300	3,0	4.7
80	25	250080	278	80	88.9	139.7	170	67	325	2,9	6.7
100	25	250100	400	100	114.3	178.0	220	80	350	3,6	13.3
125	25	250125	400	125	139.7	219.1	241	88	400	4,0	20.9