


Steel ball valves, reduced bore

female threads / copper, DN 20, reduced bore

Body	DN 20 Steel, P235GH (1.0345)
Ball	DN 20 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 20 PTFE+C
Solder connection	DN 20 Copper, EN 1057: 2006
Stem	DN 20 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 20 FPM
Operation	DN 20 With zinc-plated steel handle




Operation conditions
-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

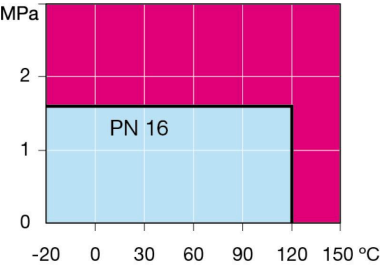


Not for steam

DN 15-50

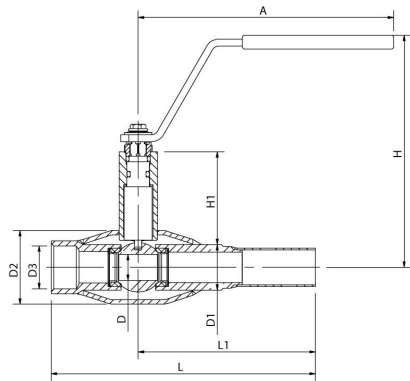

DN 15-50



DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	kg
20	16	28201570	147	10	26.9	42.4	Rp 3/4"		22.0	134	53	152	100	0.6
20	16	282005	147	10	26.9	42.4	Rp 3/4"	18.0		134	53	152	100	0.6