

# Stainless steel ball valves, reduced bore


234 series, welding / welding, EN (DIN), DN 100-250, reduced bore

|           |                                                      |
|-----------|------------------------------------------------------|
| Body      | DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Ball      | DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Ball seal | DN 100-250 PTFE+C                                    |
| Stem      | DN 100-250 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Stem seal | DN 100-250 FPM/NBR                                   |
| Operation | DN 100-250 Valve is equipped with manual gear        |




Operation conditions  
-20 °C – +200 °C  
Below -20 °C contact manufacturer  
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

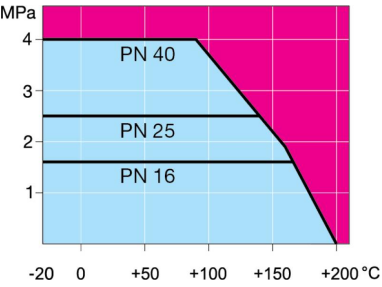


Not for steam

DN 100-250

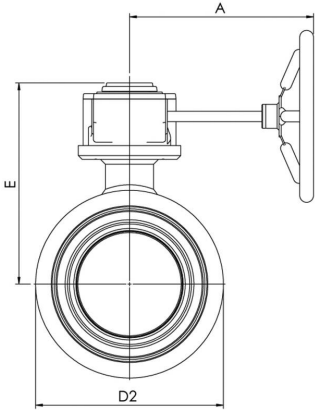

DN 100-250

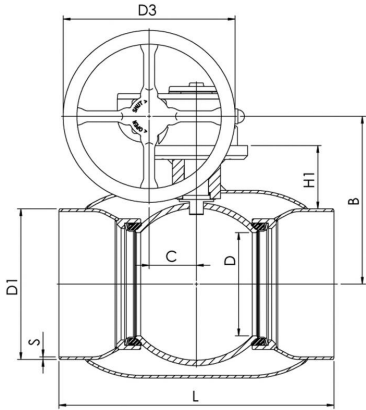

| DN  | PN | Product no. | A   | B   | C  | D   | D1    | D2    | D3    | E   | H1  | L   | S   | kg   |
|-----|----|-------------|-----|-----|----|-----|-------|-------|-------|-----|-----|-----|-----|------|
| 100 | 25 | 234100      | 187 | 159 | 53 | 80  | 114.3 | 139.7 | 125.0 | 202 | 68  | 325 | 3,0 | 13.0 |
| 125 | 25 | 234125      | 224 | 183 | 53 | 100 | 139.7 | 178.0 | 200.0 | 225 | 79  | 325 | 4,0 | 20.0 |
| 150 | 25 | 234150      | 224 | 203 | 53 | 125 | 168.3 | 219.1 | 200.0 | 246 | 85  | 350 | 4,0 | 23.0 |
| 200 | 25 | 234200      | 268 | 244 | 69 | 150 | 219.1 | 273.0 | 250.0 | 293 | 92  | 400 | 4,0 | 40.0 |
| 250 | 25 | 234250      | 301 | 294 | 97 | 200 | 273.0 | 355.6 | 300.0 | 345 | 108 | 530 | 4,0 | 77.0 |