


Control and shut-off butterfly valves, reduced bore

BRC F2 series, Δp = 25 bar, flange / flange, DN 900-1000, reduced bore


Body	DN 900-1000 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1000 1.4542 + HCr plating
Stem	DN 900-1000 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1000 Graphite
Bearing	DN 900-1000 PTFE + AISI 316 net
Operation	DN 900-1000 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 25

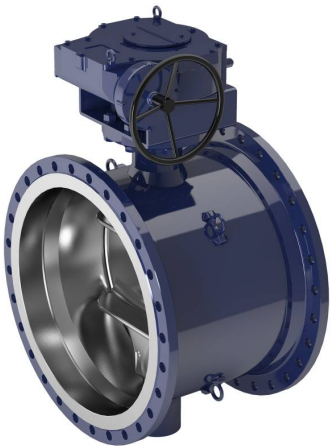


Operation conditions

Body:	PN 25
Trim:	Δp = 25 bar
Temperature:	-20 °C – +250 °C Below 0 °C contact manufacturer
Leakage rate:	A or B (EN 12266-1) Depending on requirement

DN 900-1000

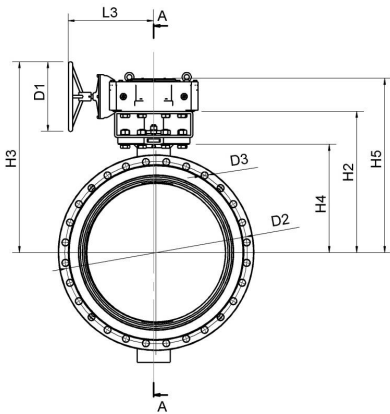

DN 900-1000

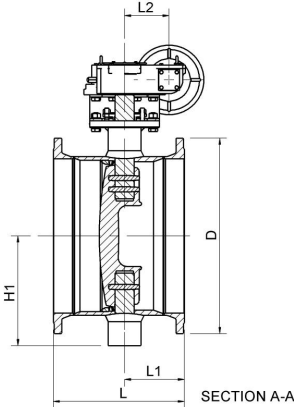

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	H5	L	L1	L2	L3	kg
900	25	BRC900F2	1185	400.0	1090.0	48.0	631	813	1098	623	1003	814	374	256	505	1675.0
1000	25	BRC1000F2	1320	400.0	1210.0	56.0	678	879	1164	689	1069	878	388	256	506	2268.0