

Stainless steel ball valves, reduced bore


232 series, female threads / female threads, DN 10-50, reduced bore

Body	DN 10-50 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 10-50 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 10-50 PTFE+C
Stem	DN 10-50 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 10-50 FPM/NBR
Operation	DN 10-50 with stainless steel handle




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

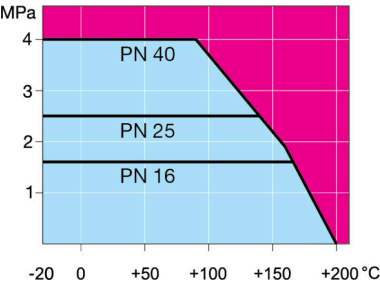

Not for steam

DN 10-50

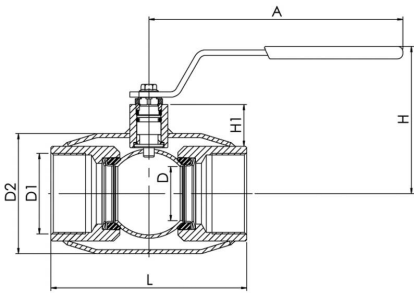

DN	PN	Product no.	A	D	D1	D2	H	H1	L	kg
10	40	232010	145	10	Rp 3/8	33.7	99	21	75	0.4
15	40	232015	145	10	Rp 1/2	33.7	99	19	85	0.4
20	40	232020	145	15	Rp 3/4	42.4	103	21	100	0.5
25	40	232025	145	20	Rp 1	48.3	113	26	115	0.8
32	40	232032	145	25	Rp 1 1/4	60.3	116	25	130	1.1
40	40	232040	188	32	Rp 1 1/2	70.0	112	31	150	1.7
50	40	232050	188	40	Rp 2	88.9	118	31	180	2.7