

Rostfria ståkulventiler, reducerat genomlopp


PN 25, fläns / fläns, DN 100-250, reducerat genomlopp

Ventilhus	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 100-250 PTFE+C
Spindel	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 100-250 FPM/NBR
Manövrering	DN 100-250 Ventil utrustad med manuell växel
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor

-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

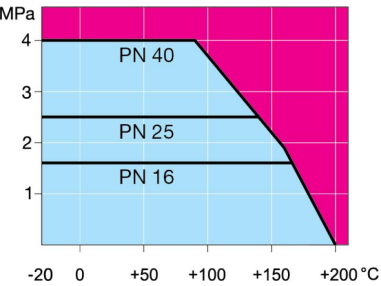


Ej för ånga

DN 100-250

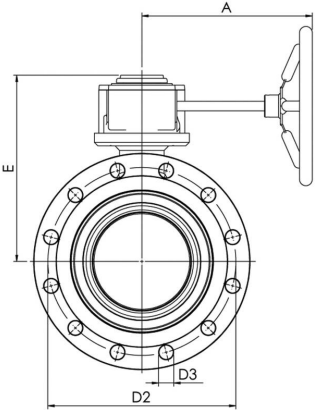

DN 100-250

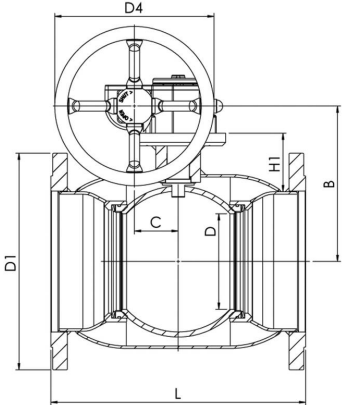

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
100	25	286522	187	159	53	80	235.0	190.0	22.0	125.0	202	68	300	28.0
125	25	286523	224	183	53	100	270.0	220.0	26.0	200.0	225	79	325	34.0
150	25	286524	224	203	53	125	300.0	250.0	26.0	200.0	246	85	350	40.0
200	25	286526	268	244	69	150	360.0	310.0	26.0	250.0	293	92	400	66.0
250	25	286527	301	294	97	200	425.0	370.0	30.0	300.0	345	108	550	120.0