


Rostfria ståkulventiler, reducerat genomlopp

PN 25, fläns / fläns, DN 65-250, reducerat genomlopp

Ventilhus	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-250 PTFE+C
Spindel	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-250 FPM/NBR
Manövrering	DN 65-250 Med förzinkat stål handtag
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40

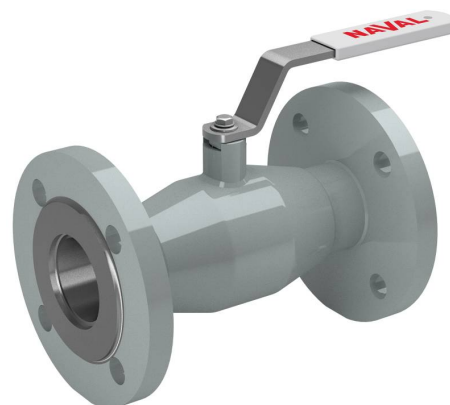

Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren

Lägstå tillåtna omgivningstemperatur -40°C


Läckageklass A (EN 12266-1)



Ej för ånga

DN 65-150

DN 200-250

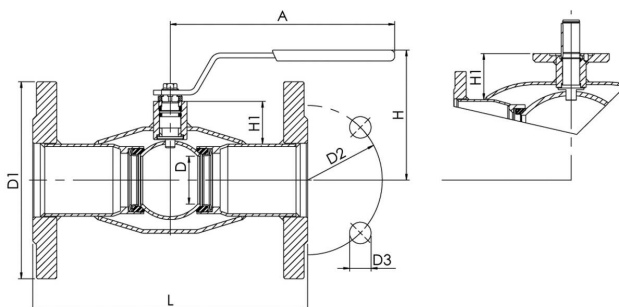

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	kg
65	25	286570	278	50	185.0	145.0	18.0	148	51	270	11.0
80	25	286571	278	65	200.0	160.0	18.0	159	58	280	13.3
100	25	286572	278	80	235.0	190.0	22.0	171	54	300	18.9
125	25	286573	400	100	270.0	220.0	26.0	220	68	325	27.7
150	25	286574	600	125	300.0	250.0	26.0	240	74	350	35.9
200	25	286576	870	150	360.0	310.0	26.0	280	92	400	59.0
250	25	286577	1200	200	425.0	370.0	30.0	340	108	550	105.0