

X-stålkulventiler, reducerat genomlopp

108X serie, X-serien, pressanslutning / pressanslutning, EN (DIN), DN 15-50 (18-54 mm), reducerat genomlopp

Ventilhus	DN 15-50 Stål, P235GH (1.0345)
Kula	DN 15-50 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 15-50 PTFE+C
Spindel	DN 15-50 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 15-50 FPM
Manövrering	DN 15-50 med komposithandtag
Pressanslutnings	DN 15-50 CIIR
O-ring (LBP)	




Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

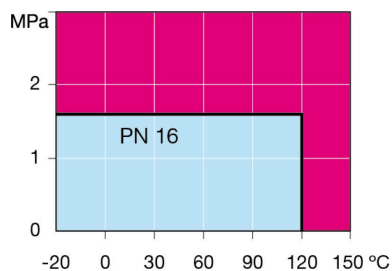

Ej för ånga

DN 15-50 (18-54 mm)

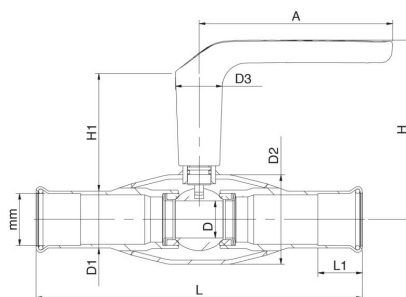

DN	PN	Product no.	RSK no.	mm	A	D	D1	D2	D3	H	H1	L	L1	kg
15	16	108015X	5494367	18	130	10	21.3	33.7	32.0	108	75	220	25	0.6
20	16	108020X	5494368	22	130	15	25.4	42.4	32.0	112	77	220	25	0.8
25	16	108025X	5494369	28	130	20	31.4	48.3	32.0	116	78	220	25	1.0
32	16	108032X	5494370	35	130	25	38.3	60.3	32.0	121	79	220	30	1.3
40	16	108040X	5494371	42	130	32	45.5	70.0	32.0	128	84	220	30	1.5
50	16	108050X	5494372	54	130	40	58.0	88.9	32.0	136	84	220	30	2.3