

Gaskulventiler, reducerat genomlopp

115/25 serie, PN 25, fläns / svetsning, EN (DIN), DN 65-300, reducerat genomlopp

Ventilhus	DN 65-300 Stål, P235GH (1.0345)
Kula	DN 65-300 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 65-300 PTFE+C
Spindel	DN 65-100 Rostfritt stål, X8CrNiS18-9 (1.4305) DN 125-150 Rostfritt stål, X17CrNi16-2 (1.4057) DN 200-300 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 65-300 NBR
Manövrering	DN 65-250 Med förzinkat stål handtag DN 300 Utan handtag
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40



Funktionsvillkor


-40 °C - +70 °C

Över 70 °C kontakta tillverkaren

Under -30 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

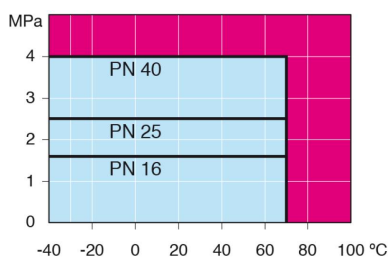


Ej för ånga

DN 65-150

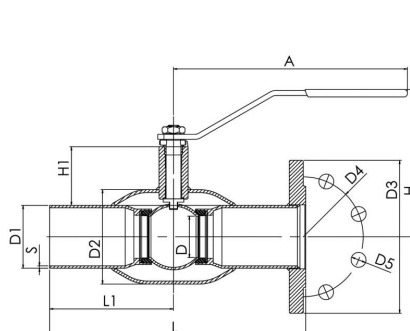

DN 200-300



DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	kg
65	25	115065/25	278	50	76.1	101.6	185.0	145.0	18.0	157	62	310	150	2.9	7.3
80	25	115080/25	278	65	88.9	121.0	200.0	160.0	18.0	170	68	310	150	3.2	9.3
100	25	115100/25	279	80	114.3	146.0	235.0	190.0	22.0	216	101	340	163	3.6	14.0
125	25	115125/25	400	100	139.7	177.8	270.0	220.0	26.0	251	101	340	163	4	23.0
150	25	115150/25	600	125	168.3	219.1	300.0	250.0	26.0	272	107	360	175	4.5	27.0
200	25	115200/25	870	150	219.1	273.0	360.0	310.0	26.0	282	92	415	200	4.5	53.0
250	25	115250/25	1200	200	273.0	355.6	425.0	370.0	30.0	350	108	540	265	5	94.0
300	25	115300/25		250	323.9	457.0	485.0	430.0	30.0		133	560	277.8	5.6	137.0