


Dubbellagrade kulventiler, reducerat genomlopp

104xx1/TR serie, fläns / fläns, DN 200-900, reducerat genomlopp

Ventilhus	DN 200-450 Stål, P355QH (1.0571) / P355NL1 (1.0566) DN 500-900 Stål, P355QH (1.0571) / P355NH (1.0565)
Kula	DN 200-900 Stål + rostfritt plätterad, ASTM A350 LF2 +Ni
Kultätning	DN 200-900 PTFE+C
Spindel	DN 200-900 Rostfritt stål, X17CrNi16-2 (1.4057)
Spindeltätning	DN 200-900 FPM
Manövrering	DN 200-900 Ventil utrustad med manuell växel
Fläns	EN 1092-1 Tillgänglig PN 16, 25, 40
Strukturell längd	EN 558 (12-serien)
Tillbehör	DN 200-900 är utrustad lyftöglor, monteringsstativ, Dräneringsventil: DN 20 för DN 200-450 ventiler, DN 32 för DN 450-1200 ventiler




Funktionsvillkor
0 °C - +200 °C
Under 0 °C kontakta tillverkaren
Lägstå tillåtna omgivningstemperatur -20°C
Läckageklass A (EN 12266-1)

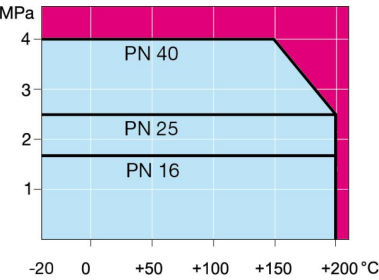


Ej för ånga

DN 200-900

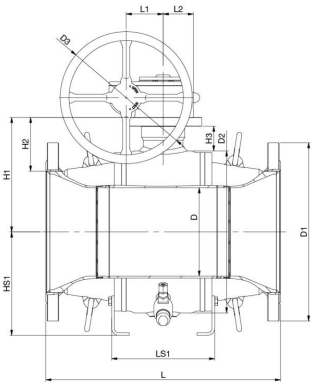

DN 200-900

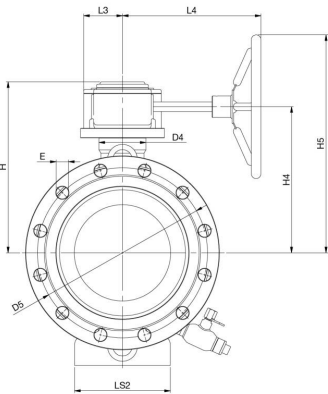

DN	PN	Product no.	D	D1	D2	D3	D4	D5	E	H	H1	H2	H3	H4	H5	HS1	L	L1	L2	L3	L4	LS1	LS2	kg
200	16	104201/TR	150	340.0	315.0	300.0	98.0	295.0	22	331	234	124	57	279	429	200	457	84	69	81	289	229	160	171.0
250	16	104251/TR	201	405.0	368.0	300.0	98.0	355.0	26	357	260	122	56	305	455	235	533	84	69	81	289	234	200	231.0
300	16	104301/TR	250	460.0	440.0	500.0	110.0	410.0	26	420	302	139	62	351	601	282	610	118	108	125	363	250	240	348.0
350	16	104351/TR	300	520.0	510.0	500.0	110.0	470.0	26	455	337	158	62	286	636	314	686	118	108	125	363	290	280	499.0
400	16	104401/TR	340	580.0	590.0	500.0	135.0	525.0	30	528	400	195	80	455	705	360	762	138	133	141	440	348	320	766.0
450	16	104451/TR	385	640.0	640.0	500.0	135.0	525.0	30	553	425	197	80	480	730	390	864	138	133	141	440	362	260	957.0
500	16	104501/TR	436	715.0	740.0	600.0	180.0	650.0	33	625	490	225	86	554	854	530	914	180	167	188	487	456	400	1178.0
600	16	104601/TR	487	840.0	822.0	600.0	200.0	770.0	36	672	537	222	88	601	901	580	1065	180	167	188	487	472	420	1627.0
700	16	104701/TR	589	910.0	980.0	700.0	200.0	840.0	36	805	616	235	88	701	1051	660	1245	253	222	255	593	524	450	2564.0
800	16	104801/TR	684	1025.0	1125.0	700.0	230.0	950.0	39	910	722	302	111	807	1157	700	1372	253	222	255	593	572	450	3706.0
900	16	104901/TR	779	1125.0	1290.0	700.0	270.0	1050.0	39	1021	833	358	138	918	1268	840	1524	253	222	255	593	700	600	5537.0

Finns även i PN 40. För mer information kontakta vår kundtjänst.
Storlek DN 500-900 tillverkade av ARMATURY Group a.s. – ingår i Vexve Armatury Group.