

Injusteringsventiler, rostfritt stål, reducerat genomlopp

PN 25, fläns / fläns, DN 65-150, reducerat genomlopp

Ventilhus	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-150 PTFE+GF
Spindel	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-150 FPM/NBR
Mätuttag	DN 65-150 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 65-150 Med förzinkat stål handtag
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägst tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

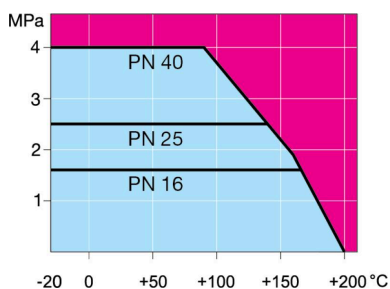

Ej för ånga

DN 65-150

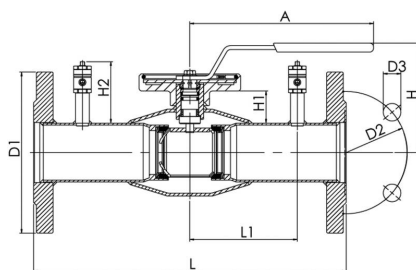

DN	PN	Product no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	25	266570V	280	185.0	145.0	18.0	148	58	82	310	110	10.8
80	25	266571V	280	200.0	160.0	18.0	160	64	82	310	110	13.5
100	25	266572V	280	235.0	190.0	22.0	173	52	82	350	122.5	19.5
125	25	266573V	400	270.0	220.0	26.0	221	68	82	360	137.5	30.8
150	25	266574V	600	300.0	250.0	26.0	240	74	82	390	150	36.0

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätton, bland annat.

Injusteringsventiler, rostfritt stål, reducerat genomlopp


PN 25, fläns / fläns, DN 200-250, reducerat genomlopp

Ventilhus	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 200-250 PTFE+GF
Spindel	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 200-250 FPM/NBR
Mätuttag	DN 200-250 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 200-250 Ventil utrustad med manuell växel
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor

-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

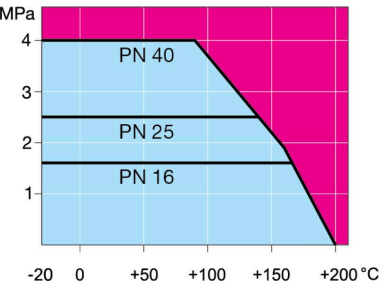


Ej för ånga

DN 200-300



DN 200-300



DN	PN	Product no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	25	266576V	268	244	69	360.0	310.0	26.0	250.0	293	72	101	101	425	195	66.0
250	25	266577V	301	294	97	425.0	370.0	30.0	300.0	345	88	107	107	550	256	113.0

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätton, bland annat.