

Injusteringsventiler, rostfritt stål, reducerat genomlopp

243/25 serie, PN 25, fläns / fläns, DN 65-150, reducerat genomlopp

Ventilhus	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-150 PTFE+GF
Spindel	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-150 FPM/NBR
Mätuttag	DN 65-150 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 65-150 Med förzinkat stål handtag
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40



Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)



Ej för ånga

DN 65-150

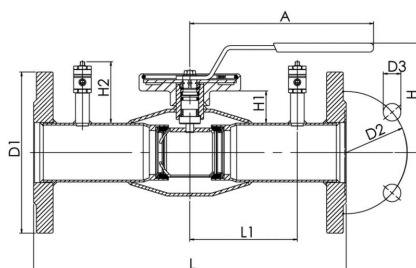

DN	PN	Product no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	25	243065/25	280	185.0	145.0	18.0	148	58	82	310	110	10.8
80	25	243080/25	280	200.0	160.0	18.0	160	64	82	310	110	13.5
100	25	243100/25	280	235.0	190.0	22.0	173	52	82	350	122.5	19.5
125	25	243125/25	400	270.0	220.0	26.0	221	68	82	360	137.5	30.8
150	25	243150/25	600	300.0	250.0	26.0	240	74	82	390	150	36.0

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätton, bland annat.

Injusteringsventiler, rostfritt stål, reducerat genomlopp


243/25 serie, PN 25, fläns / fläns, DN 200-250, reducerat genomlopp

Ventilhus	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 200-250 PTFE+GF
Spindel	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 200-250 FPM/NBR
Mätuttag	DN 200-250 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 200-250 Ventil utrustad med manuell växel
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor

-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

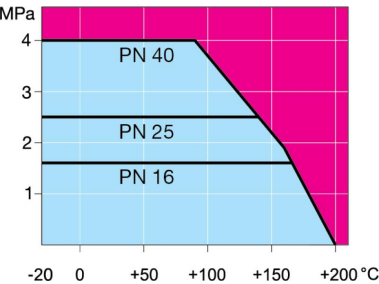


Ej för ånga

DN 200-300



DN 200-300



DN	PN	Product no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	25	243200/25	268	244	69	360.0	310.0	26.0	250.0	293	72	101	101	425	195	66.0
250	25	243250/25	301	294	97	425.0	370.0	30.0	300.0	345	88	107	107	550	256	113.0

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.